


## 2.4 TECHNICAL DATA A-151DV

|   |                              |
|---|------------------------------|
| Suitable for indoor use                 | Yes                          |
| Suitable for outdoor use                | Yes                          |
| Max. wind speed                         | 12,5 m/s                     |
| Working height approx.                  | 17,10 m                      |
| Max. platform height approx.            | 15,10 m                      |
| Min. platform height                    | 2,03 m                       |
| Platform                                | 4,24 x 2,30 m                |
| Platform traversal                      | 1,80 m                       |
| Transportation height railings down     | 2,39 m                       |
| Transportation height with railings     | 3,13 m                       |
| Transportation dimension (lxb)          | 4,42 x 2,32 m                |
| Wheelbase                               | 2,98 m                       |
| Ground clearance (centre)               | 200 mm                       |
| Turning radius (outside)                | 7,00 m                       |
| Max. load capacity (platform retracted) | 500 kg<br>(2 pers. + 340 kg) |
| Max. load capacity (platform extended)  | 500 kg<br>(2 pers. + 340 kg) |
| Lift/lowering time (max. load) ca.      | 100/65 s                     |
| Driving speed high                      | 2,2 km/h                     |
| Driving speed low                       | 0,5 km/h                     |
| Gradeability (platform lowest position) | 17%                          |
| Max. inclination grade/slope            | 3°/2,5°                      |
| Solid tyres                             | 7.00 - 15                    |
| Foam filled tyres                       | 12 x 16.50                   |
| Operating weight (standard machine)     | 7.140 kg                     |
| Max. wheel pressure                     | 5.640 kg                     |

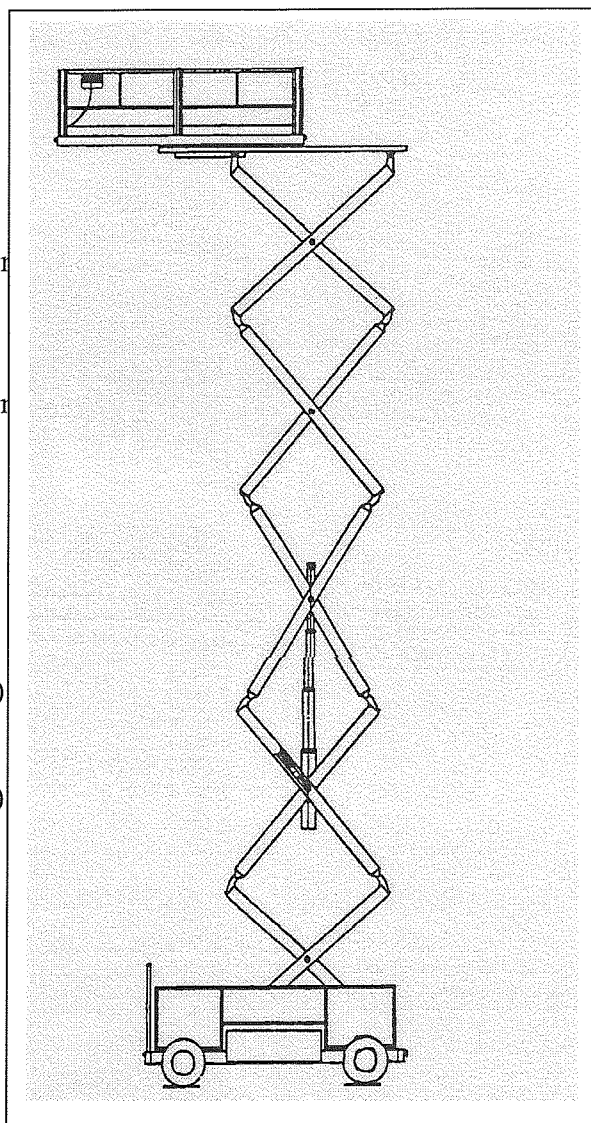

Pict. 2 Type A-151DV